



RMS REAMER SERIES





颶風鉸刀系列







颶風鉸刀系列

RMS Reamer Series




	RMS-CA直柄焊刃鉸刀 RMS-CA Straight Shank Braze Reamer	RMS-CB直柄可調精密鉸刀 RMS-CB Straight Shank Adjustable Braze Reamer
圖示 Image		
尺寸範圍 Size Range	D8~D40mm	D8~D40mm
庫存狀況 Stock Availability	整數尺寸為常備半成品庫存 點數尺寸接單生產可至做至0.01mm Standard sizes are available as semi-finished stock. Decimal sizes can be customized upon order, with precision up to 0.01mm.	整數尺寸為常備半成品庫存 點數尺寸接單生產可至做至0.01mm Standard sizes are available as semi-finished stock. Decimal sizes can be customized upon order, with precision up to 0.01mm.
微調尺寸 Fine Adjustment Size	無 N/A	0.02mm
出水方式 Coolant Type	中心孔出水或刀刃出水 Coolant through center hole or through cutting edge.	中心孔出水或刀刃出水 Coolant through center hole or through cutting edge.
特點 Feature	<ol style="list-style-type: none"> 1. 工件表面粗糙度可達Ra0.4。 2. 刀具本體抗疲勞性佳，內置高壓冷卻水路，提高刀具壽命。 3. 幾何角度設計切削刃口，提供優越加工性能。 <ol style="list-style-type: none"> 1. Achieves workpiece surface roughness up to Ra 0.4. 2. The tool body has excellent fatigue resistance, with built-in high-pressure coolant channels to extend tool life. 3. Optimized cutting edge geometry provides superior machining performance. 	<ol style="list-style-type: none"> 1. 工件表面粗糙度可達Ra0.4。 2. 刀具本體抗疲勞性佳，內置高壓冷卻水路，提高刀具壽命。 3. 幾何角度設計切削刃口，提供優越加工性能。 <ol style="list-style-type: none"> 1. Achieves workpiece surface roughness up to Ra 0.4. 2. The tool body has excellent fatigue resistance, with built-in high-pressure coolant channels to extend tool life. 3. Optimized cutting edge geometry provides superior machining performance. 

	RMS-MA模組化可調精密鉸刀頭 RMS-MA Modular Adjustable Precision Reamer Head	RMS-MB模組化可調精密鉸刀環 RMS-MB Modular Adjustable Precision Reamer Ring
圖示 Image		
尺寸範圍 Size Range	D25~D80mm	D75~D150mm
庫存狀況 Stock Availability	整數尺寸為常備半成品庫存 點數尺寸接單生產可至做至0.01mm Standard sizes are available as semi-finished stock. Decimal sizes can be customized upon order, with precision up to 0.01mm.	依據接單生產可做至0.1mm Decimal sizes can be customized upon order, with precision up to 0.1mm.
微調尺寸 Fine Adjustment Size	0.02mm	0.02mm
出水方式 Coolant Type	中心孔出水或刀刃出水 Coolant through center hole or through cutting edge.	刀刃出水 Through cutting edge.
特點 Feature	<ol style="list-style-type: none"> 1. 錐度定位，重複定位0.003mm。 2. 模組化鉸刀頭設計，可快速更換使用。 3. 搭配規零刀桿可補償機台偏擺。 4. 胚片可依加工材質選用PCD、鎢鋼、陶瓷等材質。 <ol style="list-style-type: none"> 1. Taper positioning with repeatability of 0.003mm. 2. Modular reamer head design allows for quick replacement. 3. Compatible with fine adjustment tool holders to compensate for machine runout. 4. Insert materials can be selected based on workpiece material, including PCD, carbide, and ceramic. 	<ol style="list-style-type: none"> 1. 模組化鉸刀環設計，可快速更換使用。 2. 搭配規零刀桿可補償機台偏擺。 3. 胚片可依加工材質選用PCD、鎢鋼、陶瓷等材質。 <ol style="list-style-type: none"> 1. Modular reamer ring design allows for quick replacement. 2. Compatible with fine adjustment tool holders to compensate for machine runout. 3. Insert materials can be selected based on workpiece material, including PCD, carbide, and ceramic. 

颶風鉸刀系列 - 量身打造

RMS Reamer Series - Customization

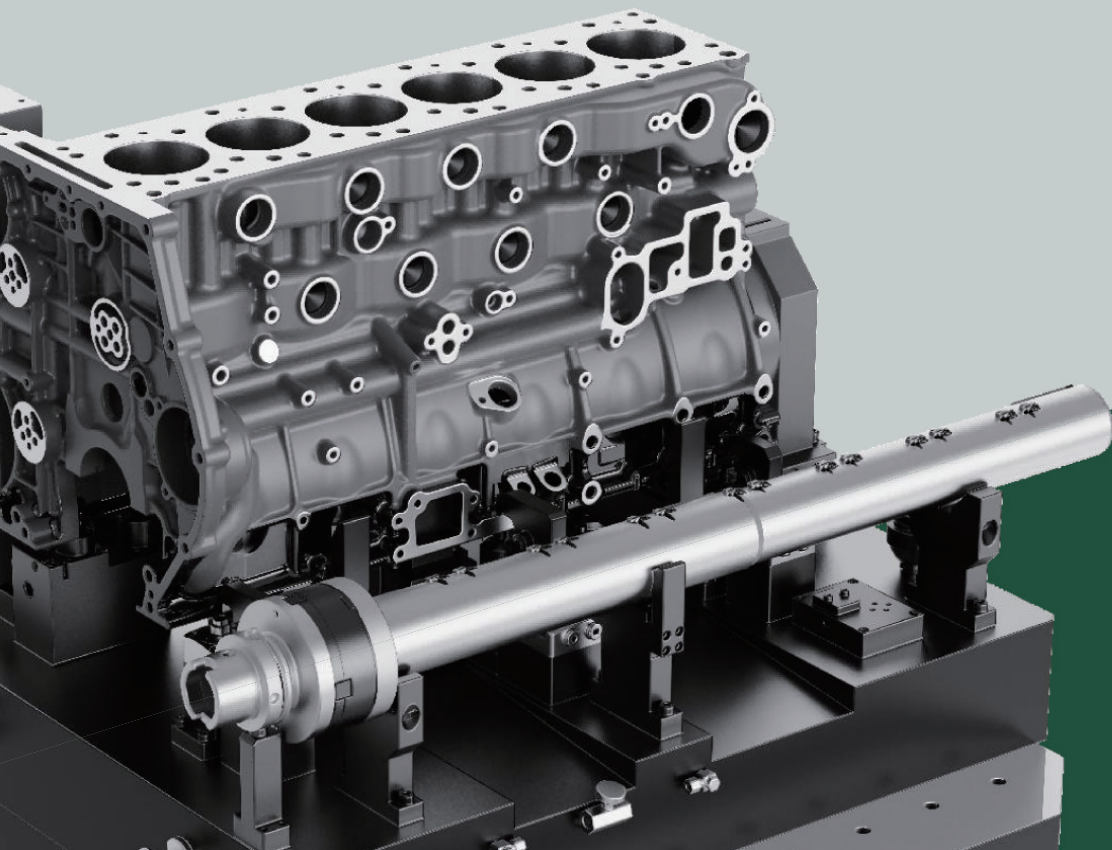



正河源股份有限公司
CHAIN HEADWAY CO.,LTD.

☎ 電話 TEL /
+886-4-26265252

☎ 傳真 FAX /
+886-4-26267941

📍 地址 Address /
436037台灣台中市清水區五權路232號
No. 232, Wuquan Rd., Qingshui Dist., Taichung City 436037, Taiwan

🌐 網址 Website /
www.chain-headway.com




公司官網(中文)



Website(EN)



LINE



WeChat



Facebook



YouTube